



Energy

Corvus

# Corvus Energy

Powering a clean future

g a cle


# SH Group 20' Container


ORCA-ESS BOB 20' Container – Containerised Battery Room – Containerised Solutions POWERED BY

#### Introduction

Orca Energy Storage Systems (Orca ESS) are the midenergy and mid-power lithium-ion battery product from Corvus Energy. The Orca ESS product line is comprised of Orca Energy's vertical configuration and horizontal configuration. Orca energy systems are designed for hybrid and all-electric ferries, tugs, cruise ships, superyachts, hybrid offshore vessels, mobile rigs, and port cranes.

This document details the mechanical, electrical and communication interface between the vessel systems and Orca Energy Storage Systems (Orca ESS). This document also details the operation modes and standard use cases for Orca ESS. The intended audience includes integrators, shipyards, and certification bodies. The Containerized Battery Room (CBR) is designed and produced after "DNVGL-CP-0553 Containerized systems Edition June 2020".

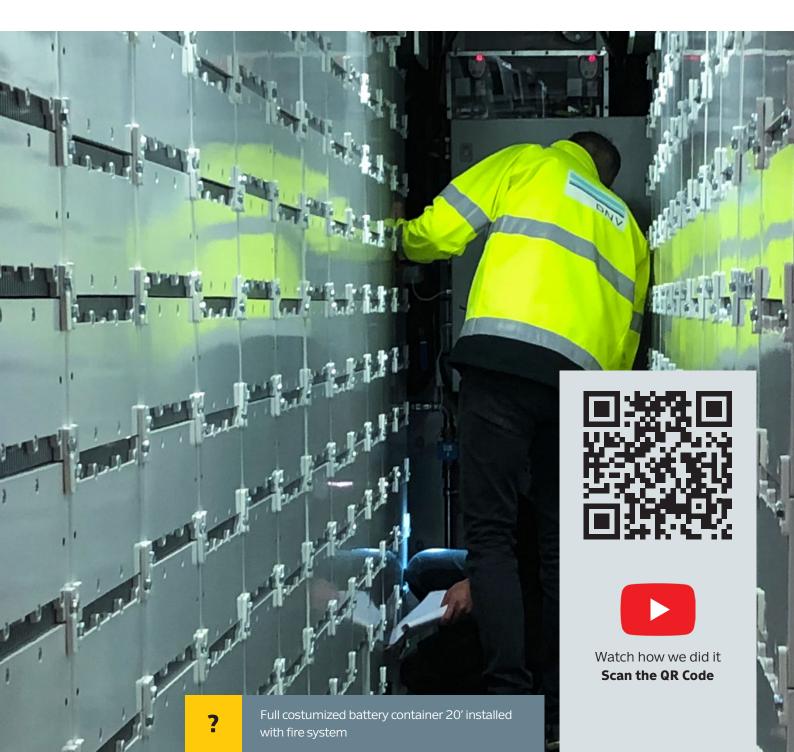

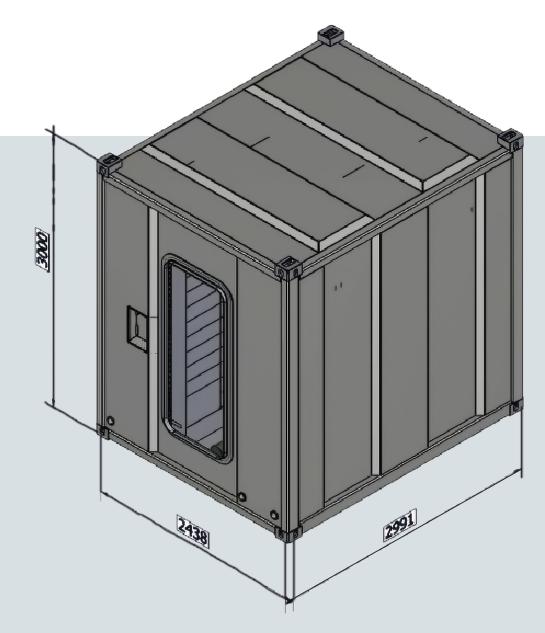





## Datasheet

Product	Containerised Battery Room (CBR)	
Туре	ORCA_BOB-10.750	
Power rating	750 kWh	
Size	Modified 10ft HQ container – 2.991 x 2.438 x 3.000 mm (LxWxH)	
Weight	App. 14.500 kg (with batteries installed)	
Climate	Nordic climate. Outside (open air) environmental conditions of: 20 °C to +35°C (70%RH)	
Equipment	<ul> <li>ORCA battery packs (6 racks/22 modules/1.100VDC)</li> <li>A60 insulated, weathertight door</li> <li>Gas detection system</li> <li>Prepared for fire detection system integration</li> <li>Firefighting system: Water mist, Optional: N0VAC1230</li> <li>HVAC: 13,9 kW cooling / 3,8 kW Heating / 6 ACH</li> <li>Penetrations Roxtec, std. DIN-flanges, ventilation square flanges</li> <li>Internal speaker for PA/GA</li> <li>All interface connections prepared in internal switchboard</li> </ul>	
Electrical	<ul> <li>Short circuit (pr. rack)</li> <li>EoL - 6,4kA - max. 3ms - Internal fuse for SC protection</li> <li>Note: Battery racks are not bridged inside CBR</li> <li>Max. voltage Power &gt; 1.100VDC AUX.</li> <li>Voltage Normal</li> <li>Supply: 3x230VAC 50/60Hz Fuse: 50A</li> <li>Emergency Supply: 3x230VAC</li> <li>50/60Hz</li> <li>Fuse: 16A</li> </ul>	
Cooling	DN32 pipe from vessels chilled water system - Minimum pressure 3 bars. Temperature 7/12°C	
Paint	SA 2,5 + 120 my epoxy + 60 my polyurethane (RAL 9016)	
Structural design	Designed acc. to deckhouse principal - DNVGL-RU-SHIP Pt.3 Ch.6 Sec.8	
Approvals	DNV-GL Type Approval	

Note: Subject to change without notice

### **Customer Connection Interface**

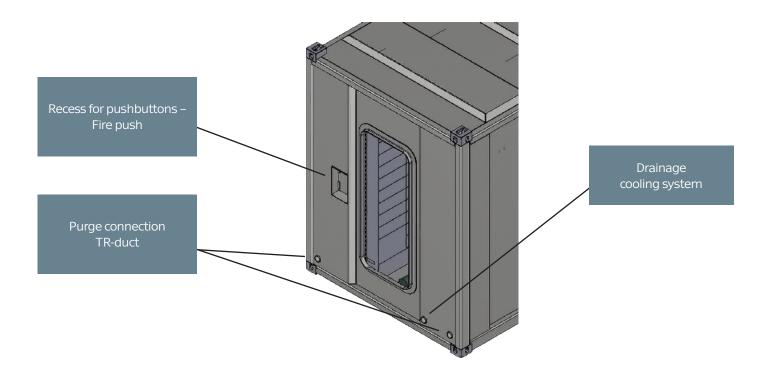

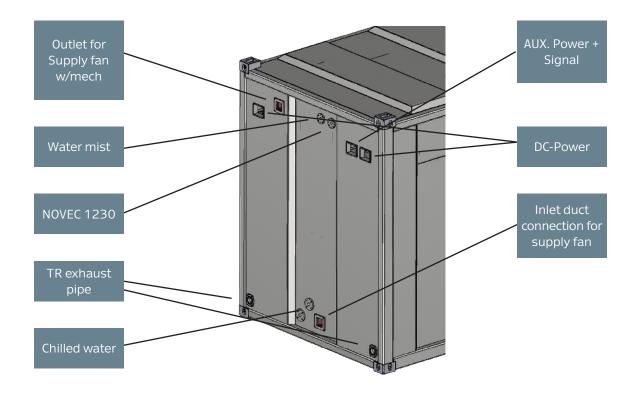

Purpose	Description	Details
2 x DC-power	Roxtec S4 filled w/RM 30-blocks	DC power inlet/out 2x1x185 per rack (max. 6 x 2x1x185mm2)
1 x AUX. Power + signal	Roxtec S4 filled w/various RM-blocks	Control interface (minimum) 1 x 3x220V Normal supply 1 x 3x220V Emergency supply 1 x CAT7 communication cable 1 x 14x2x0,75mm2 Hardwired signals 1 x 4x1,5mm2 emergency stop circuit
1 x Fire push button	Roxtec R70	Cables prepared for fire push button (loop topology)
2 x Purge connections	3/8"BSP (Thru Roxtec RS68)	In case of a TR-event the pipping needs to be purge, (see separate docment). 3/8 BSP pipe connection
1 x Drainage Cooling system	1″BSP (Thru Roxtec RS68)	No pipe connection needed, only if location of CBR is not suitable for deck drainage. 1" BSP pipe connection.
2 x Chilled water	DN32 PN16 flanges bolted	DN40 pipe from vessels chilled- water system. Minimum pressure 3 bar. Temperature 7/12°C.
1 x Water mist	DN25 PN16 flange bolted	DN25 pipe from vessels water mist system. Minimum pressure 16 bar.
1 x NOVEC 1230 system (Optional)	DN25 PN16 flange bolted	If applicable. NOVEC 1230 "dry water" bottle to be in- stalled outside the CBR. Manual release of fire suppression.
1 x Ventilation inlet	100x100mm bolted	Ventilation duct from vessel accommodation. 100x100 ducting Minimum flow 130 m2/h
1 x Ventilation outlet	1 x 100x100mm bolted	Do not block. Must be to open deck.
1 x OFES /TR exhaust pipe	SAE 2.5"	Do not block. Must be to open deck.

Note: Subject to change without notice

